

Solid Ramps

° = degree of slope

% = percent grade

					15.5° (28%)	16 in. (41 cm)
					17° (30%)	14 in. (36 cm)
					14.5° (26%)	12 in. (30 cm)
					16.1° (29%)	10 in. (25 cm)
					14.5° (26%)	9 in. (23 cm)
					12° (29%)	8 in. (20 cm)
					17° (30%)	7 in. (18 cm)
					14.5° (26%)	6 in. (15 cm)
16.1° (29%)	12° (21%)	8° (14%)	6° (10%)	4.8° (12%)	5 in. (13 cm)	
12.8° (23%)	9.6° (17%)	6.4° (11%)	4.8° (8%)	3.8° (11%)	4 in. (10 cm)	
9.6° (17%)	7.2° (13%)	4.8° (8%)	3.6° (6%)	2.9° (9%)	3 in. (8 cm)	
6.4° (11%)	4.8° (8%)	3.2° (6%)	2.4° (4%)	1.9° (7%)	2 in. (5 cm)	
3.2° (6%)	—	—	—	—	1 in. (2.5 cm)	
1.5 ft. (46 cm)	2 ft. (61 cm)	3 ft. (91 cm)	4 ft. (122 cm)	5 ft. (152 cm)		
Ramp Length (feet/cm)						

16 in. (41 cm)

14 in. (36 cm)

12 in. (30 cm)

10 in. (25 cm)

9 in. (23 cm)

8 in. (20 cm)

7 in. (18 cm)

6 in. (15 cm)

5 in. (13 cm)

4 in. (10 cm)

3 in. (8 cm)

2 in. (5 cm)

1 in. (2.5 cm)

15.5° (28%)

17° (30%)

14.5° (26%)

16.1° (29%)

14.5° (26%)

12° (29%)

17° (30%)

14.5° (26%)

16.1° (29%)

12.8° (23%)

9.6° (17%)


6.4° (11%)

3.2° (6%)

degree of slope

= percent grade

- Incline chart for reference only
- Refer to mobility devices' documentation for recommended maximum incline
- If using the ramp as a permanent device, refer to the ADA guidelines for maximum incline

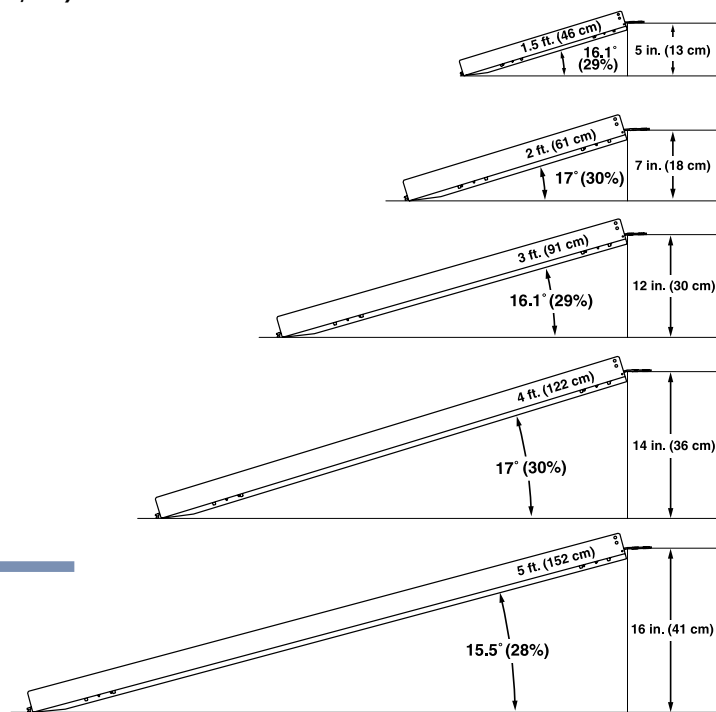

Single Fold & Solid Ramps



Single Fold Ramps



Solid Ramps



Single Fold Ramps

Pride® Silver Star™ single-fold ramps offer a reliable solution for transitioning curbs, thresholds and other obstacles. They are available in several different lengths and can accommodate a weight capacity of 600 lbs. Plus, lightweight Silver Star Ramps are easily portable, making them ideal for home and travel.

- 600 lbs. lifting capacity
- 3-year transferable warranty
- Lightweight & portable
- Quick delivery, nationwide distribution
- Integrated, high traction surface
- Comprehensive product line
- Competitively priced
- Available in: 2', 3', 4', 5', 6'

Solid Ramps

New solid ramps from Pride® Silver Star™ Lifts and Ramps provide long-term access for mobility devices to a variety of environments. Built with the quality you expect, Pride Silver Star Solid Ramps are light-weight but strong, with a weight capacity of 600 lbs. and are available in a variety of lengths.

- 600 lbs. lifting capacity
- 3-year transferable warranty
- Lightweight
- Built in traction control
- Slotted for moisture drainage
- Aluminum construction
- Side rails for safety
- Securement components for mounting purposes
- 29.5" wide
- Available in: 18", 2', 3', 4', 5'

The information contained herein is correct at the time of publication; we reserve the right to alter specifications without prior notice.

Single Fold Ramps

° = degree of slope

% = percent grade

				16.1° (29%)	20 in. (51 cm)	Rise (inches/cm)
				14.5° (26%)	18 in. (46 cm)	
			15.5° (28%)	12.8° (23%)	16 in. (41 cm)	
		17° (30%)	13.5° (24%)	11.2° (20%)	14 in. (36 cm)	
		14.5° (26%)	11.5° (27%)	9.6° (17%)	12 in. (30 cm)	
	16.1° (29%)	12° (21%)	9.6° (23%)	8.0° (14%)	10 in. (25 cm)	
	14.5° (26%)	10.8° (19%)	8.6° (20%)	7.2° (13%)	9 in. (23 cm)	
	12° (29%)	9.6° (17%)	7.7° (16%)	6.4° (11%)	8 in. (20 cm)	
17° (30%)	11.2° (27%)	8.4° (15%)	6.7° (16%)	5.6° (10%)	7 in. (18 cm)	
14.5° (26%)	9.6° (23%)	7.2° (13%)	5.7° (14%)	4.8° (8%)	6 in. (15 cm)	
12° (21%)	8° (14%)	6° (10%)	4.8° (12%)	4.0° (7%)	5 in. (13 cm)	
9.6° (17%)	6.4° (11%)	4.8° (8%)	3.8° (11%)	3.2° (5.5%)	4 in. (10 cm)	
7.2° (13%)	4.8° (8%)	3.6° (6%)	2.9° (9%)	2.4° (4%)	3 in. (8 cm)	
4.8° (8%)	3.2° (6%)	2.4° (4%)	1.9° (7%)	—	2 in. (5 cm)	
2 ft. (61 cm)	3 ft. (91 cm)	4 ft. (122 cm)	5 ft. (152 cm)	6 ft. (183 cm)		

Ramp Length (feet/cm)

Single Folded Ramps Specifications

LENGTH	WIDTH FOLDED	WIDTH UNFOLDED	WEIGHT
2'	14.75"	29.5"	12.0 lbs.
3'	14.75"	29.5"	17.5 lbs.
4'	14.75"	29.5"	23.5 lbs.
5'	14.75"	29.5"	29.5 lbs.
6'	14.75"	29.5"	35.0 lbs.

- Incline chart for reference only
- Refer to mobility devices' documentation for recommended maximum incline
- If using the ramp as a permanent device, refer to the ADA guidelines for maximum incline

