


### Specification

Nominal Voltage	12 Volts
Nominal Capacity (10H-R)	14 Ah
CCA	230
Approximate Weight (With Acid)	10.80 lbs (4.9 kg)
Recommended Maximum Charging Current Limit	4.2A
Equalization and Cycle Service	14.8 VDC/unit Average at 25°C
Terminal Type	D
Warranty	1 Year Full Replacement

### Physical Dimensions: in (mm)

L: 6.00" (152mm) W: 3.44" (87mm) H: 6.40" (163mm)

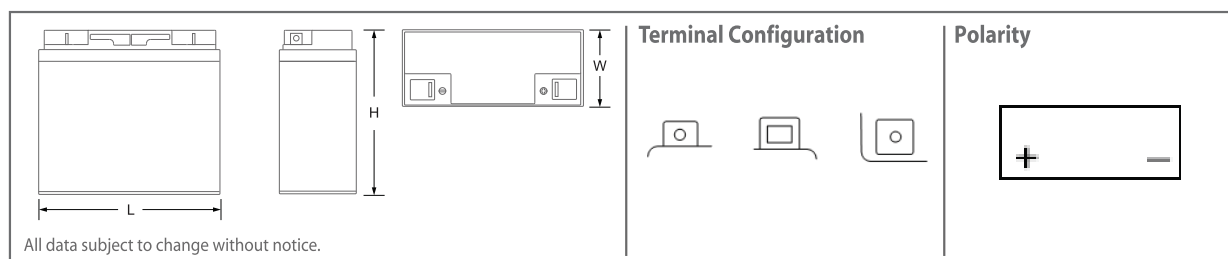

Front



Side



Terminals

### Filling Instructions

- Before filling, ensure your new battery is the correct size for your vehicle. Once the battery is filled, it cannot be returned to vendor.
- Only use the acid pack that comes with your battery.
- Remove the sealing plugs from electrolyte cells on the battery.
- Remove filler cap strip from electrolyte bottle to expose silver foils. DO NOT remove silver foils.
- Push the bottle down into the cells piercing the seals. Fill your battery with all the contents of the acid pack.
- The bottle contains the exact amount of electrolyte needed for the battery. DO NOT add water.
- After the filling, replace the sealing plugs on each battery cell. Do not remove the sealing plugs for charging.

### Charging Instructions

- Charge the battery fully before installing.
- Never charge the battery with a charger that delivers more than 4 amps of current. Larger chargers will harm the battery.
- For optimum performance, UPG recommends charging and maintaining with the Adventure Power® Maintainer 4000 battery charger.
- This charger maintainer can remain connected to the battery indefinitely.

Adventure Power is a registered trademark of Universal Power Group, Inc.  
Phantom logo is a trademark of Universal Power Group, Inc.

[www.apbatteries.com](http://www.apbatteries.com)

[www.upgi.com](http://www.upgi.com)

488 S. Royal Lane | Coppell, Texas 75019 | P 469.892.1122 | T 866.892.1122 | F 469.892.1123 | [sales@apbatteries.com](mailto:sales@apbatteries.com)

Q1310-1